




The
Patent
Office

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP9 1RH

U.S.A. 658-1-1

CERTIFIED COPY OF PRIORITY DOCUMENT

10523 U.S. PTO
09/172435



10/14/98

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated 13/8/98

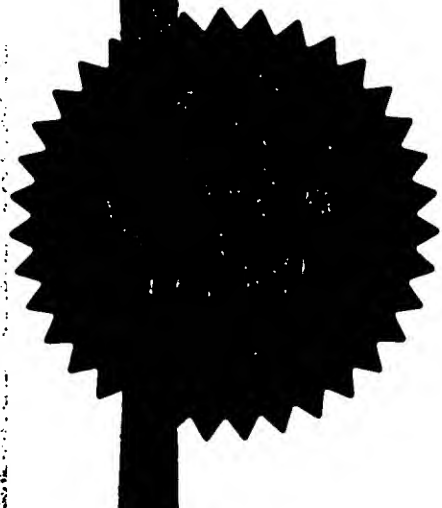

THIS PAGE BLANK (USPTO)

Request for grant of a patent
(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

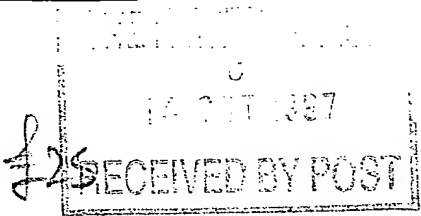

14OCT97 E309584-6 D02879
P01/7700 25.00 - 9721662.6
The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Your reference PHB 34200

Patent application number
(The Patent Office will fill in this part) **9721662.6** **14 OCT 1997**

Full name, address and postcode of the or of each applicant (underline all surnames) PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (if you know it) ~~06628487001~~
6363782001

If the applicant is a corporate body, give the country/state of its incorporation THE NETHERLANDS

Title of the invention ENCODED VIDEO SIGNAL FORMATTING

Name of your agent (if you have one) ANDREW GORDON WHITE

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) Philips Electronics
Patents & Trade Marks Department
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (if you know it) ~~974790007~~ **7133473001**

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number (if you know it)	Date of filing (day/month/year)

If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)

Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d)) YES

Patents form 1/77

Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	9 (x2)
Claims(s)	4 (x2)
Abstract	1 (x2)
Drawings	2 (x2)

If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(Please specify)

1. I/We request the grant of a patent on the basis of this application.

Signature



Date

13 October 1997

2. Name and daytime telephone number of person to contact in the United Kingdom

01293 815299

(Andrew G White)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" *Patents Form 7/77* will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

ENCODED VIDEO SIGNAL FORMATTING

5 The present invention relates to the formatting of predictive-encoded digital video signals for storage on a recording medium, especially but not exclusively an optical or magnetic disc, as well as to storage media carrying the particularly formatted signals, and encoding and decoding apparatus supporting the particular signal format.

10 With reference to predictive encoding, we are principally concerned with the MPEG coding schemes as defined in ISO 11172 (MPEG-1) and ISO 13818 (MPEG-2), although it will be recognised that it is applicable to other coding schemes, particularly motion-compensated and hybrid-DCT (discrete cosine transformation) based coding schemes, such as the
15 H.261 and H.263 standards for video-telephony. MPEG and H.261 are digital coding systems conventionally used for storing and compressing natural picture sequences, with the decoders being designed to interpret such encoded data and reproduce the same original sequence of images.

20 The MPEG standard recognises three types of pictures (frames) namely intra-pictures, predicted pictures and interpolated pictures, generally referred to as I-, P-, and B-pictures respectively. A typical MPEG picture sequence is shown in Figure 1 of the accompanying drawings. I-pictures are specifically intended to provide access points for
25 random pictures and as such they are coded complete, with only limited compression. P-pictures are coded with reference to a past (I or P) picture and often form a reference for future P-pictures. B-pictures have the highest degree of compression but require both a past and future reference for their generation.

MPEG compressed video stored on an optical or magnetic disc (CD, DVD, DVD-RAM, hard-disk etc.) or other linearly-read digital storage means may be seen as a replacement for analog video storage systems such as video tape and laser disc. One of the known problems with using predictively coded video is how to implement the so-called trick modes that users take for granted (fast-forward and reverse play being the best known examples). As it is not generally possible to speed up or reverse the conventional display process, it becomes necessary to skip through the encoded data, at the same time seeking suitable access points: in the Figure 1 example, it is only possible to start decompressing the video data stream at the points indicated, where the I-frames do not rely on contributions from prior to the access point.

The step of locating these access points brings another problem, in that the compressed frames in the sequence are of varying lengths and hence the procedure involves more than simply counting bits from the start of a previous frame. Some systems solve the problem by introducing data into the video stream with pointers to future access points (as I-frames are indicated in DVD-Video): the problem with this approach is that a second pass is needed to fill in these pointers. This makes real-time recording (one pass as with conventional VCR) impossible.

It is therefore an object of the present invention to provide a means whereby predictively-encoded digital video signals may be decompressed in one or various trick-play modes.

In accordance with a first aspect of the present invention there is provided a method for formatting a sequence of video images comprising the steps of: encoding successive images of the sequence according to a predetermined coding scheme in which some images of the sequence

are intra-coded, without reference to any other image of the sequence, and the remainder are respectively coded with reference to at least one further image of the sequence; formatting the encoded data for each image frame into one or a sequence of data blocks and outputting a data block stream formed of the data block or blocks from successive ones of the sequence of video images; characterised in that the step of formatting comprises the further steps of identifying intra-coded frames and of inserting additional data blocks in said data block stream, each of said additional blocks carrying data identifying the relative location in the data block stream of the first or only data block of an intra-coded image frame.

Preferably, a single additional data block (also referred to herein as an information block) is inserted in the data block stream at fixed periodically repeated intervals, such as for example every 25th data block of the stream; where the data blocks are all of a common size, skipping from one information block to another becomes a relatively simple matter. Each additional data block may store data identifying the first or only data block in the data block stream of the closest previously formatted intra-coded image frame, and may also store further data identifying the length of the said closest previously formatted intra-coded image frame. As above, the image frames may be encoded in accordance with MPEG standards, or another predictive coding scheme may be employed.

Also in accordance with the present invention there is provided a sequentially-readable storage device carrying an encoded and formatted sequence of video image frames wherein some images of the sequence are intra-coded, without reference to any other image of the sequence, and the remainder are respectively coded with reference to at least one further image of the sequence, and the encoded data for the succession of image frames is formatted into a sequence of fixed size data blocks, with at least one data block per encoded image frame, with the stored

sequence of data blocks including additional data blocks, with each such additional data block identifying the storage device storage location of the first or only data block of an intra-coded image frame.

5 Within the storage device, the said additional data blocks are suitably provided at fixed periodically repeated intervals within the stored sequence of encoded image data blocks, with each said additional data block containing data identifying the storage device storage location of the first or only data block of the closest previously formatted intra-coded image frame. Where the storage device is an optical disc, the said
10 additional data blocks may identify the location of the first or only data block of the closest preceding intra-coded image frame in terms of the location on disc at which said data block is stored.

 Where the storage device carries at respective separate storage locations auxiliary data associated with respective encoded image frames, for example subtitling data, each said additional data block may further
15 carry data identifying the storage device storage location of the auxiliary data associated with the particularly indicated intra-coded image frame. In this way, the auxiliary data may be included in the trick-play.

 Further in accordance with the present invention there is provided
20 an encoder apparatus operable to implement the formatting method set forth above, the apparatus comprising means for encoding successive images of a video image sequence according to a predetermined coding scheme in which some images of the sequence are intra-coded, without reference to any other image of the sequence, and the remainder are
25 respectively coded with reference to at least one further image of the sequence; means for formatting the encoded data for each image frame into one or a sequence of fixed size data blocks and outputting a data block stream formed of the data block or blocks from successive ones of the sequence of video images, said means for formatting being operable

to identify intra-coded frames, and being configured to insert additional data blocks in said data block stream, each of said additional blocks carrying data identifying the relative location in the data block stream of the first or only data block of an intra-coded image frame.

5 Still further in accordance with the present invention there is provided a video image player configured to receive and read the sequence of data blocks from a sequentially-readable storage device as set forth above, said player comprising a decoder arranged to receive the stream of data blocks, decode the image data and output a sequence of
10 video image frames, said player being operable to output selected ones of said sequence in a fast-forward or fast reverse mode, the player comprising means for selecting frames by selecting every N^{th} additional data block and displaying the respectively identified intra-coded image frame.

15 Further features and advantages of the present invention will become apparent from reading of the following description of preferred embodiments of the invention, given in terms of MPEG compressed video by way of example only, with reference to the accompanying drawings in which:
20

Figure 1 schematically represents a conventional video frame sequence according to MPEG standards;

Figure 2 represents an MPEG frame sequence formatted as a data block sequence according to the invention;

25 Figure 3 shows an optical disc holding frame sequences such as that of Figure 2;

Figure 4 is a block schematic drawing of an encoder apparatus embodying the present invention; and

Figure 5 is a block schematic diagram of a decoder apparatus

embodying the present invention.

5 The method for formatting starts with the encoding of successive
images of the sequence as MPEG I-, B-, or P-frames to generate a
sequence of encoded frames such as that of Figure 1. Note that fields
rather than frames may be the basic encoded entity, although the
technique is unchanged: the following example refers just to frames
although the skilled reader will recognise that this is not intended as in
any way limiting. The formatting operation itself divides the encoded data
10 for each image frame into one, or more usually several, data blocks which
would conventionally be output in sequence as a data block stream. For
convenience of handling, these data blocks are chosen to be of a
common size, although this is not a prerequisite to successful operation.

15 In order to enable I-frames to be rapidly located, and thus enable
trick-modes, additional data blocks (information blocks) are inserted at
regular intervals in the data block stream, for example at every 25th or
30th block. The encoded video is embedded within a multiplexed stream
when recorded to disc, with the information blocks being classed as
"private" data such that a demultiplexer will generally ignore them and
20 thus avoid disturbing the MPEG sequence. Each of these information
blocks carries data identifying the starting location (and preferably also
length) of the previous I-frame as it appears in the data block stream.

25 To implement fast-forward through the video frames, a suitably
configured player will seek to an arbitrary information block and, using the
data therein, locate the preceding I-frame and decode it. Depending on
the speed of fast-forward, the player then skips to the next (or Nth)
information block and repeats the process, thus skipping through the
video stream at an increased speed. The speed of viewing depends on
the number of information blocks skipped as, although the compressed

video frames are of variable length, the overall compressed bit rate remains approximately constant.

Figure 2 represents the data block sequence for a video image sequence compressed as:

5 IBPBPBPBIBPBPBPBI

Each of the letters appearing in the sequence in Figure 2 represents one data block on the storage medium: as can be seen, the I-frames (being coded complete) require the greatest number of data blocks for recording. As also shown, the sequence is interrupted every 25th block by the inclusion of an information block (represented by i) with arrows 10,12 representing how the information block identifies the first data block of the immediately preceding I-frame.

Figure 3 represents a sequentially-readable storage device, in the form of a DVD disc 14, carrying the encoded and formatted sequence of video image frames. The disc has the conventional centre hole 16 and clamping area 18 surrounded by a pair of read-out surfaces 20 provided by respective transparent substrates 22 over recorded layers 24, with the upper and lower layers being separated by an adhesive layer 26. As schematically shown, within the recorded tracks, the periodically spaced information blocks 28 contain the location of the start of the preceding I-frame 30.

Figure 4 schematically represents an encoding and formatting apparatus operable to generate the streams of data blocks such as that in Figure 2. From an image data source 40 an MPEG encoder 42 generates the compressed I-, P-, and B-frame data and outputs it to frame data store 44. As the data is read into the frame data store, it is also passed to a monitoring stage 46 which detects I-frames. Coupled to read the data out of the frame data store 44 is formatting stage 48 which forms the sequential stream of data blocks: the formatting stage is also

coupled to receive indication of I-frames from the monitoring stage 46 and, based on this information, it generates the periodic information frames and inserts them in the output block stream to a storage apparatus write/recording stage 50.

5 Figure 5 schematically represents a video image player configured to receive and read the sequence of data blocks, including information blocks, from a suitable sequentially-readable storage device such as the disc of Figure 3. The player comprises a disc reader 60 operating under control of a CPU 62 to read data from disc 14 to decoder stage 64 (via
10 the CPU). In the decoder stage 64, coupled with a frame store 66, the video image sequence is recreated in the frame store before being output to a display, such as a television 68.

 User input means 70 are coupled with the player CPU 62 and include controls for initiating the various trick-modes supported: as will be
15 well understood, these controls may be provided on the player itself or on a remote control handset coupled by infra-red link. On entering a trick-mode, such as fast-forward, the CPU directs the decoder 64 to skip frames by selecting every N^{th} additional data block and displaying just the respectively identified I-frame. In a domestic appliance, the value of N
20 may be fixed (constant fast-forward/reverse rate): in professional/studio apparatus, however, it may be variable in response to user input.

 Whilst shown in Figures 4 and 5 as hardware devices, it will be understood that the encoding and decoding procedures may be carried out off-line wholly or partially in a software implementation.

25 From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of video signal encoding and decoding systems and devices and component parts thereof and which may be used instead of or in addition

to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure in the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

CLAIMS

1. A method for formatting a sequence of video images comprising the steps of:

5 encoding successive images of the sequence according to a predetermined coding scheme in which some images of the sequence are intra-coded, without reference to any other image of the sequence, and the remainder are respectively coded with reference to at least one further image of the sequence;

10 formatting the encoded data for each image into one or a sequence of data blocks and outputting a data block stream formed of the data block or blocks from successive ones of the sequence of video images;

15 characterised in that the step of formatting comprises the further steps of identifying intra-coded frames and of inserting additional data blocks in said data block stream, each of said additional blocks carrying data identifying the relative location in the data block stream of the first or only data block of an intra-coded image frame.

20 2. A method as claimed in Claim 1, wherein a single additional data block is inserted in said data block stream at fixed periodically repeated intervals.

25 3. A method as claimed in Claim 1 or Claim 2, wherein each additional data block stores data identifying the first or only data block in the data block stream of the closest previously formatted intra-coded image frame.

4. A method as claimed in Claim 3, wherein each additional data block stores further data identifying the length of the said closest

previously formatted intra-coded image frame.

5 5. A method as claimed in any of Claims 1 to 4, wherein the image frames are encoded in accordance with MPEG standards and all data blocks in the data block stream are of a common size.

10 6. A storage device capable of being sequential read and carrying an encoded and formatted sequence of video image frames wherein some images of the sequence are intra-coded, without reference to any other image of the sequence, and the remainder are respectively coded with reference to at least one further image of the sequence, and the encoded data for the succession of image frames is formatted into a sequence of data blocks, with at least one data block per encoded image frame, with the stored sequence of data blocks including additional data
15 blocks, with each such additional data block identifying the storage device storage location of the first or only data block of an intra-coded image frame.

20 7. A storage device as claimed in Claim 6, wherein the said additional data blocks are provided at fixed periodically repeated intervals within the stored sequence of encoded image data blocks, and all data blocks are of a common size.

25 8. A storage device as claimed in Claim 6 or Claim 7, wherein each said additional data block contains data identifying the storage device storage location of the first or only data block of the closest previously formatted intra-coded image frame.

 9. A storage device as claimed in Claim 8, carrying at

5 respective separate storage locations auxiliary data associated with
 respective encoded image frames and each said additional data block
 further carries data identifying the storage device storage location of the
 auxiliary data associated with the particularly indicated intra-coded image
 frame.

10 10. A storage device as claimed in Claim 8, in the form of an
 optical disc, wherein the said additional data blocks identify the location
 of the first or only data block of the closest preceding intra-coded image
 frame in terms of the location on disc at which said data block is stored.

15 11. An encoder apparatus operable to implement the method of
 Claim 1, said apparatus comprising means for encoding successive
 images of a video image sequence according to a predetermined coding
 scheme in which some images of the sequence are intra-coded, without
 reference to any other image of the sequence, and the remainder are
 respectively coded with reference to at least one further image of the
 sequence;

20 means for formatting the encoded data for each image frame into
 one or a sequence of data blocks and outputting a data block stream
 formed of the data block or blocks from successive ones of the sequence
 of video images, said means for formatting being operable to identify
 intra-coded frames, and being configured to insert additional data blocks
 in said data block stream, each of said additional blocks carrying data
25 identifying the relative location in the data block stream of the first or only
 data block of an intra-coded image frame.

 12. A video image player configured to receive and read the
 sequence of data blocks from a sequentially-readable storage device as

claimed in Claim 6, said player comprising a decoder arranged to receive the stream of data blocks, decode the image data and output a sequence of video image frames, said player being operable to output selected ones of said sequence in a fast-forward or fast reverse mode, the player comprising means for selecting frames by selecting every N^{th} additional data block and displaying the respectively identified intra-coded image frame.

13. A method for formatting a sequence of video images substantially as hereinbefore described and with reference to the accompanying drawings.

14. A storage device capable of being sequentially read and carrying a formatted sequence of video images substantially as hereinbefore described and with reference to the accompanying drawings.

15. Apparatus for encoding a sequence of video images substantially as hereinbefore described and with reference to the accompanying drawings.

16. Video image player apparatus including means for decoding a sequence of video images substantially as hereinbefore described and with reference to the accompanying drawings.

ABSTRACT

ENCODED VIDEO SIGNAL FORMATTING

5 A method and apparatus are provided to enable variable speed
forwards or reverse play of motion-prediction coded sequences of video
signal frames. Successive images of a sequence are MPEG encoded
with some images of the sequence becoming I-frames and the remainder
P- or B-frames. The frame data is formatted to sequences of fixed size
10 data blocks (I,P,B) to form a data block stream into which further,
information, blocks (i) are inserted at periodic intervals. Each information
block (i) carries a pointer to the relative location in the data block stream
of the first data block of the immediately preceding I-frame.

15 (Figure 2)

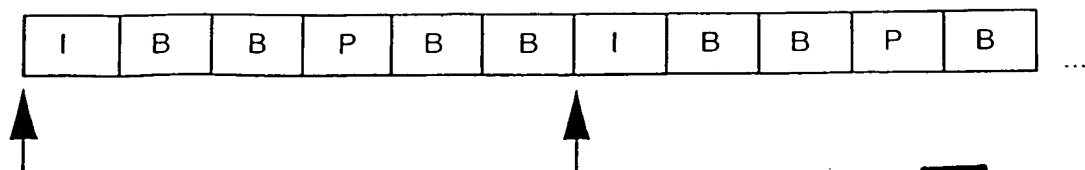


FIG. 1
(PRIOR ART)



FIG. 2

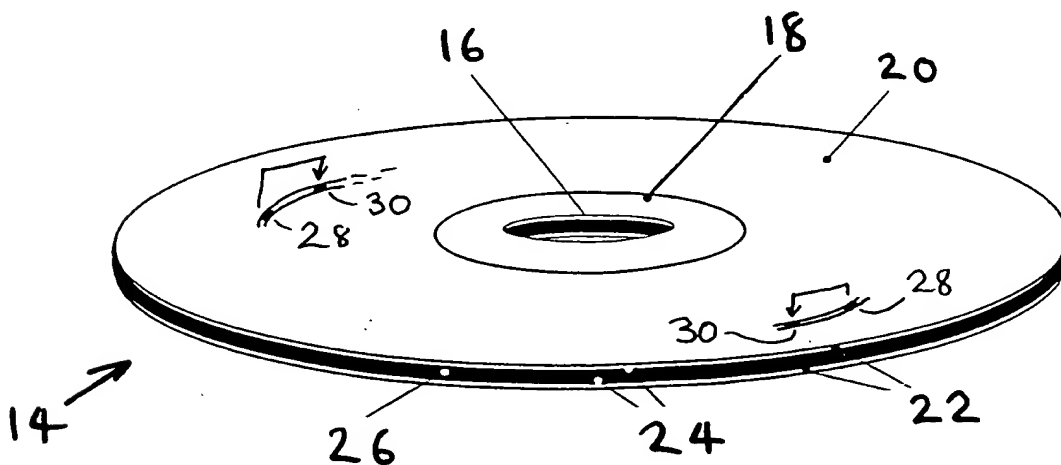


FIG. 3
PHB 34200

THIS PAGE BLANK (USPTO)

2 / 2

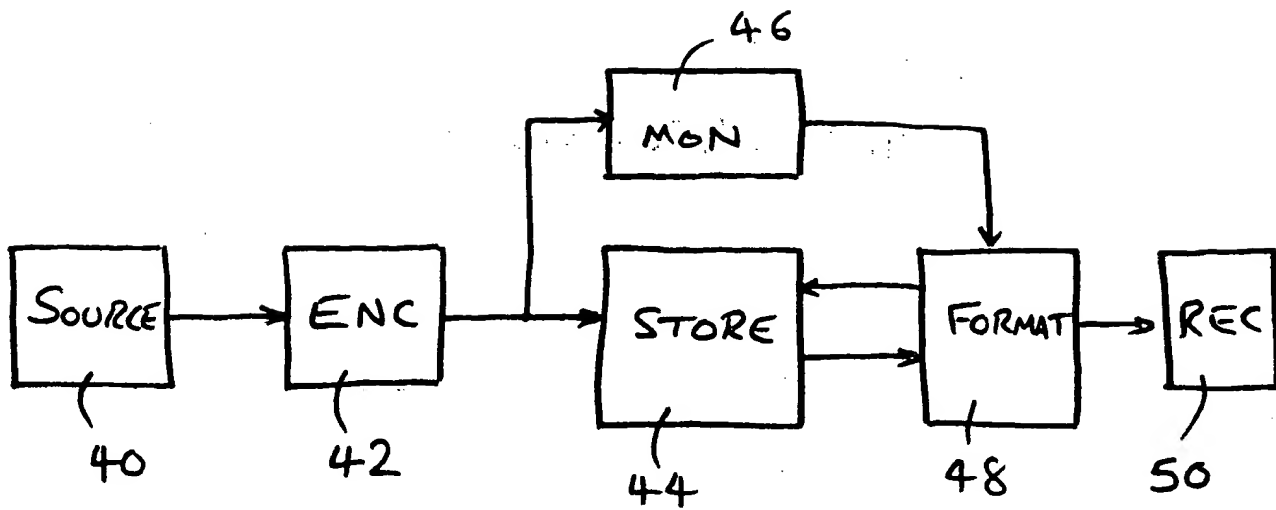


FIG. 4

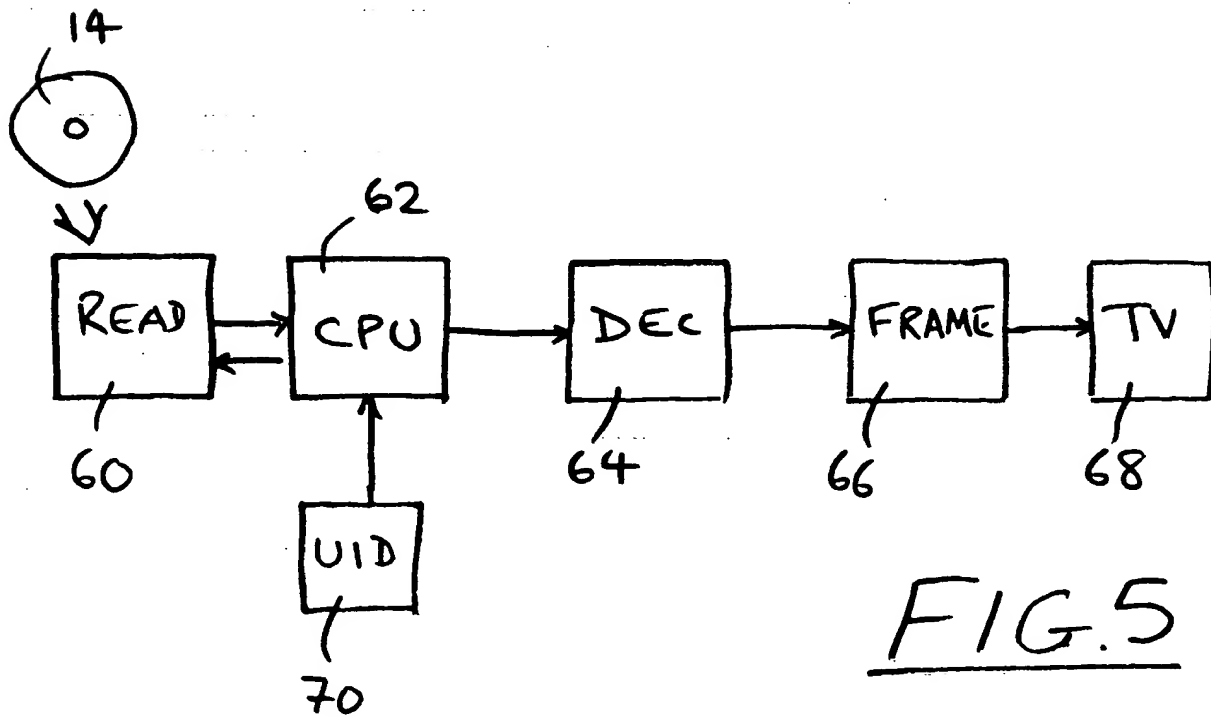


FIG. 5

THIS PAGE BLANK (USPTO)